




MACCHINE PER MAGLIERIA SPECIALI PER USO TECNICO
SPECIAL KNITTING MACHINE FOR TECHNICAL USE

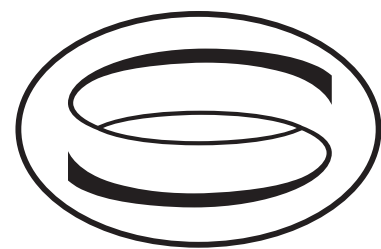

samatex
Knitting Technology


> AZIENDA

La Samatex é un'azienda costruttrice di macchine circolari per maglieria.

Con un'esperienza lavorativa esemplare e grande passione nel campo tessile.

La Samatex progetta e realizza macchine circolari venendo sempre incontro alle necessità dei suoi clienti:

- PROGETTAZIONE E COSTRUZIONE DI MACCHINE CIRCOLARI SPECIALI
- TRASFORMAZIONE MACCHINE SU RICHIESTE SPECIFICHE
- CONSULENZA TECNICA VELOCE E IMMEDIATA

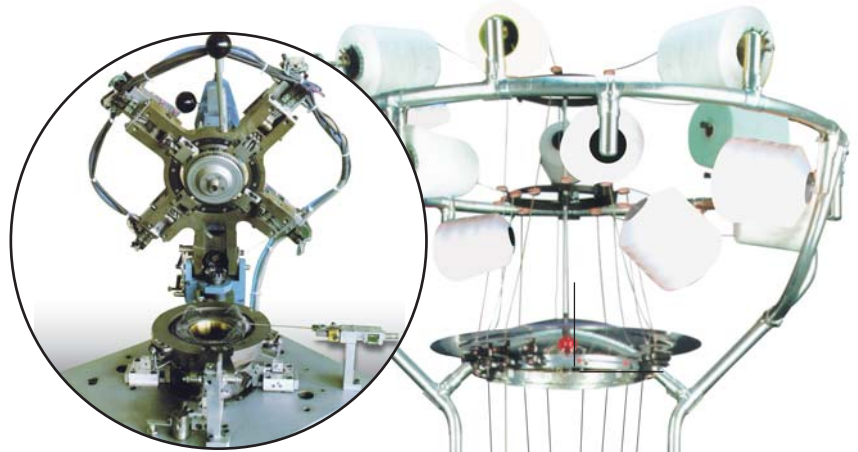

- Particolare testata a 4 cadute
- Detail showing a 4 feed knitting head

SBS 4

Macchina circolare per la produzione di calze tubolari con punta chiusa per fodera interna di stivali.

Si possono realizzare calze sia lisce che in spugna ed anche in spugna trattenuta o alternata.

Circular knitting machine for the production of tubular socks closed extremity (toe) to be used as inner lining of boots.

This model of machine can produce plain simple knitted fabric, terry fabric, as well as tuck or alternate fabric.

CARATTERISTICHE TECNICHE

DIAM.	4"
AGHI	144 a 256
CAD.	4
VEL.	350 rpm.
TENS.	220/380 Volt. 50-60hz
PROD.	40-60 paia/ora


TECHNICAL FEATURES

DIAM.	4"
NEEDLE	144 to 256
FEED	4
SPEED	350 Rpm.
TENS.	220/380 Volt. 50-60hz.
PROD.	40-60 pairs of socks/hour




- Stivali con calza a punta chiusa monocolora
- Boots lined with knitted one-colour socks featured with closed extremity (toe).



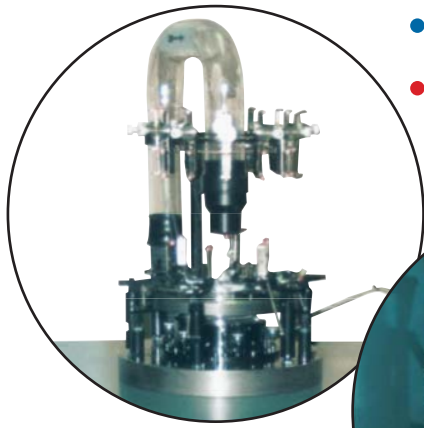

- Particolare testata a 6 cadute
- Detail showing a 6 feed knitting head

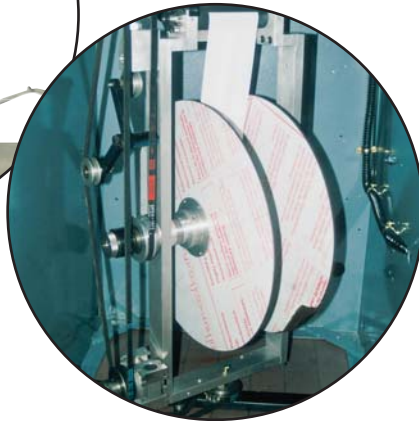

- Tiraggio con arrotolatore (opzionale)
- Take-up roller (optional)

SKM 4

Macchina circolare per tessuto a maglia tubolare continuo per fodera interna degli stivali.

Può essere realizzato in maglia liscia o spugna usando fili sintetici o naturali.

La versione con l'arrotolatore è usata anche per favorire la stampa del tessuto.

Circular knitting machine for the production of continuous tubular knitted fabric to be applied as boots inner lining.

The machine can produce it both in simple or in terry fabric. Natural and synthetic yarns can be used.

The machine version equipped with the take-up roller is more suitable in case the fabric must be printed.

CARATTERISTICHE TECNICHE

DIAM.	3" - 3" 1/2 - 3" 3/4 - 4" - 4" 1/2
FIN.	10-28
CAD.	4-6
VEL.	200 rpm.
TENS.	220/380 Volt.
PROD.	30-50 mts/hour


TECHNICAL FEATURES

DIAM.	3" - 3" 1/2 - 3" 3/4 - 4" - 4" 1/2
NEEDLE	10-28
FEED	4-6
SPEED	200 rpm.
TENS.	220/380 Volt.
PROD.	30-50 mts/hour



- Stivali con maglia tubolare liscia o stampata
- Boots with printed and plain simple inner lining tubular knitted fabric





samatex
Knitting Technology

Samatex di Sandonini Giovanni
Via Padania, 18 - 25030 Castelmella (Bs)
tel. e fax 030 267263 - cell. 335 6538865
www.samatex.com > info@samatex.com